
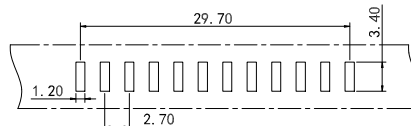




RoHS
Compliant

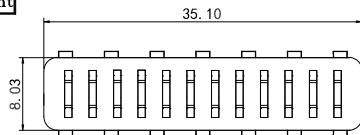

NOTE:

Material

Insulator: LCP

Contact: C2680

Contact Plated: Gold over Nickel or Tin
Specification

Current Rating: 12A

Instant Current: 15A

Rated Voltage: 12V

Contact Resistance: 30mΩ

Insulation Resistance: 100MΩ

Dielectric Voltage: 500V

Operating Temperature: -40° ~105°

RECOMMENDED PCB LAYOUT
T=0.65MM, TOLERANCES ±0.05MM

2	HOUSING	LCP	1	GRAY
1	CONTACT TERMINAL	C2680	12	Au PLATED
NO. PARTS		MATERIAL	QTY.	FINISHING

DISONG ELECTRONIC CO., LTD.

COPYRIGHT RESERVED, PLEASE DO NOT COPY.

PART NAME	CONNECTOR		DRAWING	Y. C. Zhang	DWG. No.	
PART NO.	DS-B31M-12P-R1		CHECK	G. C. Chen	REV.	A1
	UNIT :	TOLERANCE	APPROVAL		DATE	24-11-2020
	mm	OTHERWISE	SCALE	2:1	PAGE	1 OF 1